


Safety distance from source of hazard

□ 120 mm

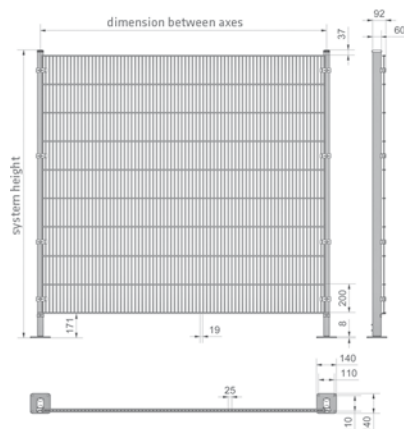

Effective length of element
500|1000|1500|2000 mm

Standard post


consisting of rectangular steel pipes with assembly set (post cap, drive-in mesh holder, plastic clamping element with steel screw, base plate)

Mesh elements

Horizontal round wires one-sided 5,5 mm or flat steel 15/6 mm, vertical wires 3,5 mm, spot-welded

Mesh size

distance of the horizontal wires 190 mm, standard distances of the vertical wires 19 mm That amounts to a mesh size of 19 x 190 mm

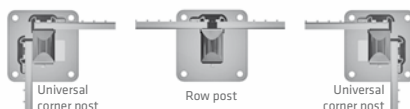

Horizontal wires one-sided 5,5 mm or flat steel 15/6 mm, vertical wires 3,5 mm, spot-welded



Height-adjustable base plate included within the scope of delivery

System height 2000 mm

Order no.	Colour group 2 RAL	Colour group 3 RAL	Colour group 4 RAL	Mesh elements/Posts in mm W x H
B18005019	2-7035	3-xxxx	4-xxxx	500 x 1800 mm
B18010019	2-7035	3-xxxx	4-xxxx	1000 x 1800 mm
B18015019	2-7035	3-xxxx	4-xxxx	1500 x 1800 mm
B18020019	2-7035	3-xxxx	4-xxxx	2000 x 1800 mm
Row post BRP2000	2-7035	3-xxxx	4-xxxx	60/40/2000 mm
Universal corner post BEPLR2000	2-7035	3-xxxx	4-xxxx	60/40/2000 mm

System height 2200 mm

Order no.	Colour group 2 RAL	Colour group 3 RAL	Colour group 4 RAL	Mesh elements/Posts in mm W x H
B20005019	2-7035	3-xxxx	4-xxxx	500 x 2000 mm
B20010019	2-7035	3-xxxx	4-xxxx	1000 x 2000 mm
B20015019	2-7035	3-xxxx	4-xxxx	1500 x 2000 mm
B20020019	2-7035	3-xxxx	4-xxxx	2000 x 2000 mm
Row post BRP2200	2-7035	3-xxxx	4-xxxx	60/40/2200 mm
Universal corner post BEPLR2200	2-7035	3-xxxx	4-xxxx	60/40/2200 mm

Example for the correct method of ordering

Order no. **B18005019** + Colour group **2** + RAL colour no. **7035** = Complete Order no **B18005019-2-7035**

Specifications are subject to technical changes without notice.

Other widths and heights are available upon request: Phone: 0049 - (0) 5223-79 19 95 -0 | Fax: 0049 - (0) 5223-79 19 95 - 90