


HIGH LINE | Mesh and Posts

Safety distance from source of hazard

120 mm

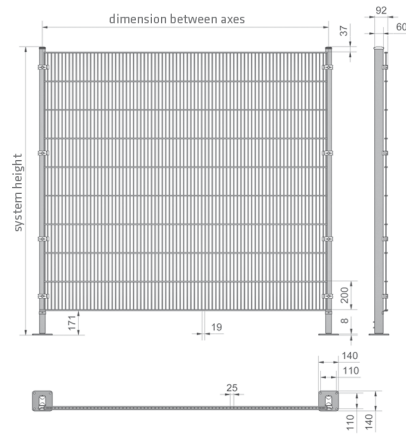

Effective length of element
250|500|1000|1500|2000|2500* mm

*Mesh width only available in system height 2000 mm

Standard post



consisting of rectangular steel pipes with plastic caps, plastic clamping element with steel screw, preassembled plastic holding elements, as well as height-adjustable base plates

Mesh elements

2 horizontal wires (8 mm) with inside lying vertical wires (6 mm), spot-welded

Mesh size

distance of the horizontal wires 190 mm, standard distances of the vertical wires 19 mm That amounts to a mesh size of 19 x 190 mm



2 horizontal wires (8 mm) with inside lying vertical wires (6 mm), spot-welded



Height-adjustable base plate, mounted on the post ex factory

System height 2000 mm

Order no.	Colour group 2	Colour group 3	Colour group 4	Mesh elements / Posts in mm W x H
	RAL	RAL	RAL	
H18002519	2-7035	3-xxxx	4-xxxx	250 x 1800 mm
H18005019	2-7035	3-xxxx	4-xxxx	500 x 1800 mm
H18010019	2-7035	3-xxxx	4-xxxx	1000 x 1800 mm
H18015019	2-7035	3-xxxx	4-xxxx	1500 x 1800 mm
H18020019	2-7035	3-xxxx	4-xxxx	2000 x 1800 mm
H18025019	2-7035	3-xxxx	4-xxxx	2500 x 1800 mm
Reihenpfosten RP 2000	2-7035	3-xxxx	4-xxxx	60/40/2000 mm
Eckpfosten L EPL2000	2-7035	3-xxxx	4-xxxx	60/40/2000 mm
Eckpfosten R EPR2000	2-7035	3-xxxx	4-xxxx	60/40/2000 mm

System height 2400 mm

Order no.	Colour group 2	Colour group 3	Colour group 4	Mesh elements / Posts in mm W x H
	RAL	RAL	RAL	
H22002519	2-7035	3-xxxx	4-xxxx	250 x 2200 mm
H22005019	2-7035	3-xxxx	4-xxxx	500 x 2200 mm
H22010019	2-7035	3-xxxx	4-xxxx	1000 x 2200 mm
H22015019	2-7035	3-xxxx	4-xxxx	1500 x 2200 mm
H22020019	2-7035	3-xxxx	4-xxxx	2000 x 2200 mm
Row post RP 2400	2-7035	3-xxxx	4-xxxx	60/40/2400 mm
Corner post L EPL2400	2-7035	3-xxxx	4-xxxx	60/40/2400 mm
Corner post R EPR2400	2-7035	3-xxxx	4-xxxx	60/40/2400 mm

Example for the correct method of ordering:

Order no. **H18002519** + Colour group **2** + RAL colour no. **7035** = Complete order no **H18002519-2-7035**

Specifications are subject to technical changes without notice

Other widths and heights are available upon request: Phone: 0049 - (0) 5223-79 19 95 - 0 | Fax: 0049 - (0) 5223-79 19 95 - 90